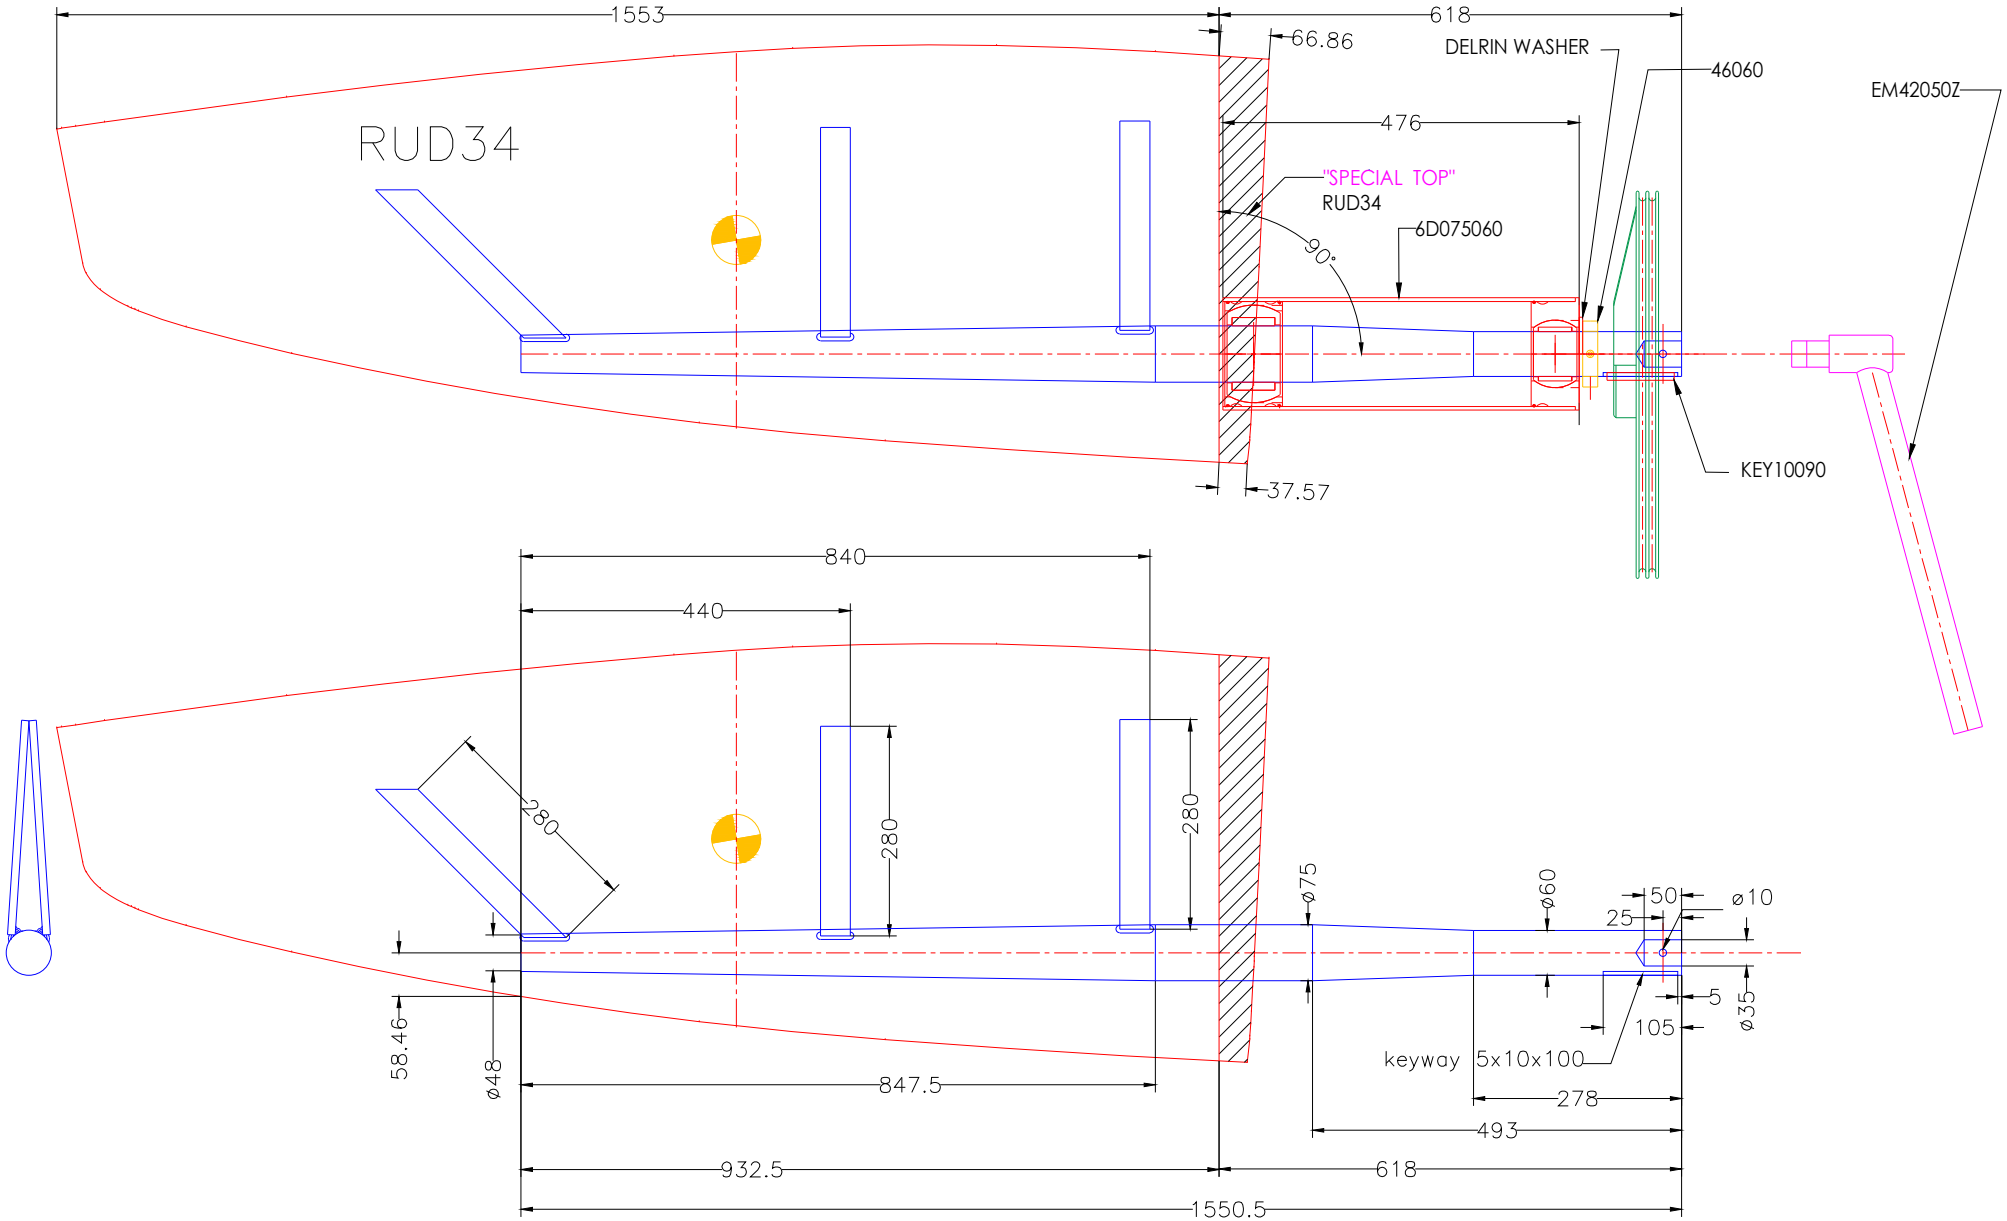

The blade will be made of 1 layer 300g chopped e-glass and 3 layers of 600g chopped e-glass.

The stock will be laminated to one side of the blade with 2 layers of 600g e-glass.

The blade will be filled with a PU form core. Minimum density pr cubic meter 80kg

Welding of spokes, will be full TIG welded A4.
Welding of ø40 shaft, will be full TIG welded A4.

The rudder will be made after ISO12215-8

Modify date	Project:	Cotemporary Classic 40' RUD34 with 75mm stock	
Modify date			
Modify date	Scale	1:10	Date 2015-12-23
Modify date	Material	AISI 316	Drawing no. —
Modify date	Filename (dwg)	CC40-Rud 34 special top	
Modify date	Drawn by	M.B.	

Jefa Rudder SYSTEMS
JEFA MARINE A/S
NIMBUSVEJ 2
2670 GREVE, DENMARK
Tlf.+45-4615 5210 & Fax +45-4615 5208
E-mail info@jefa.com & WWW.jefa.com