


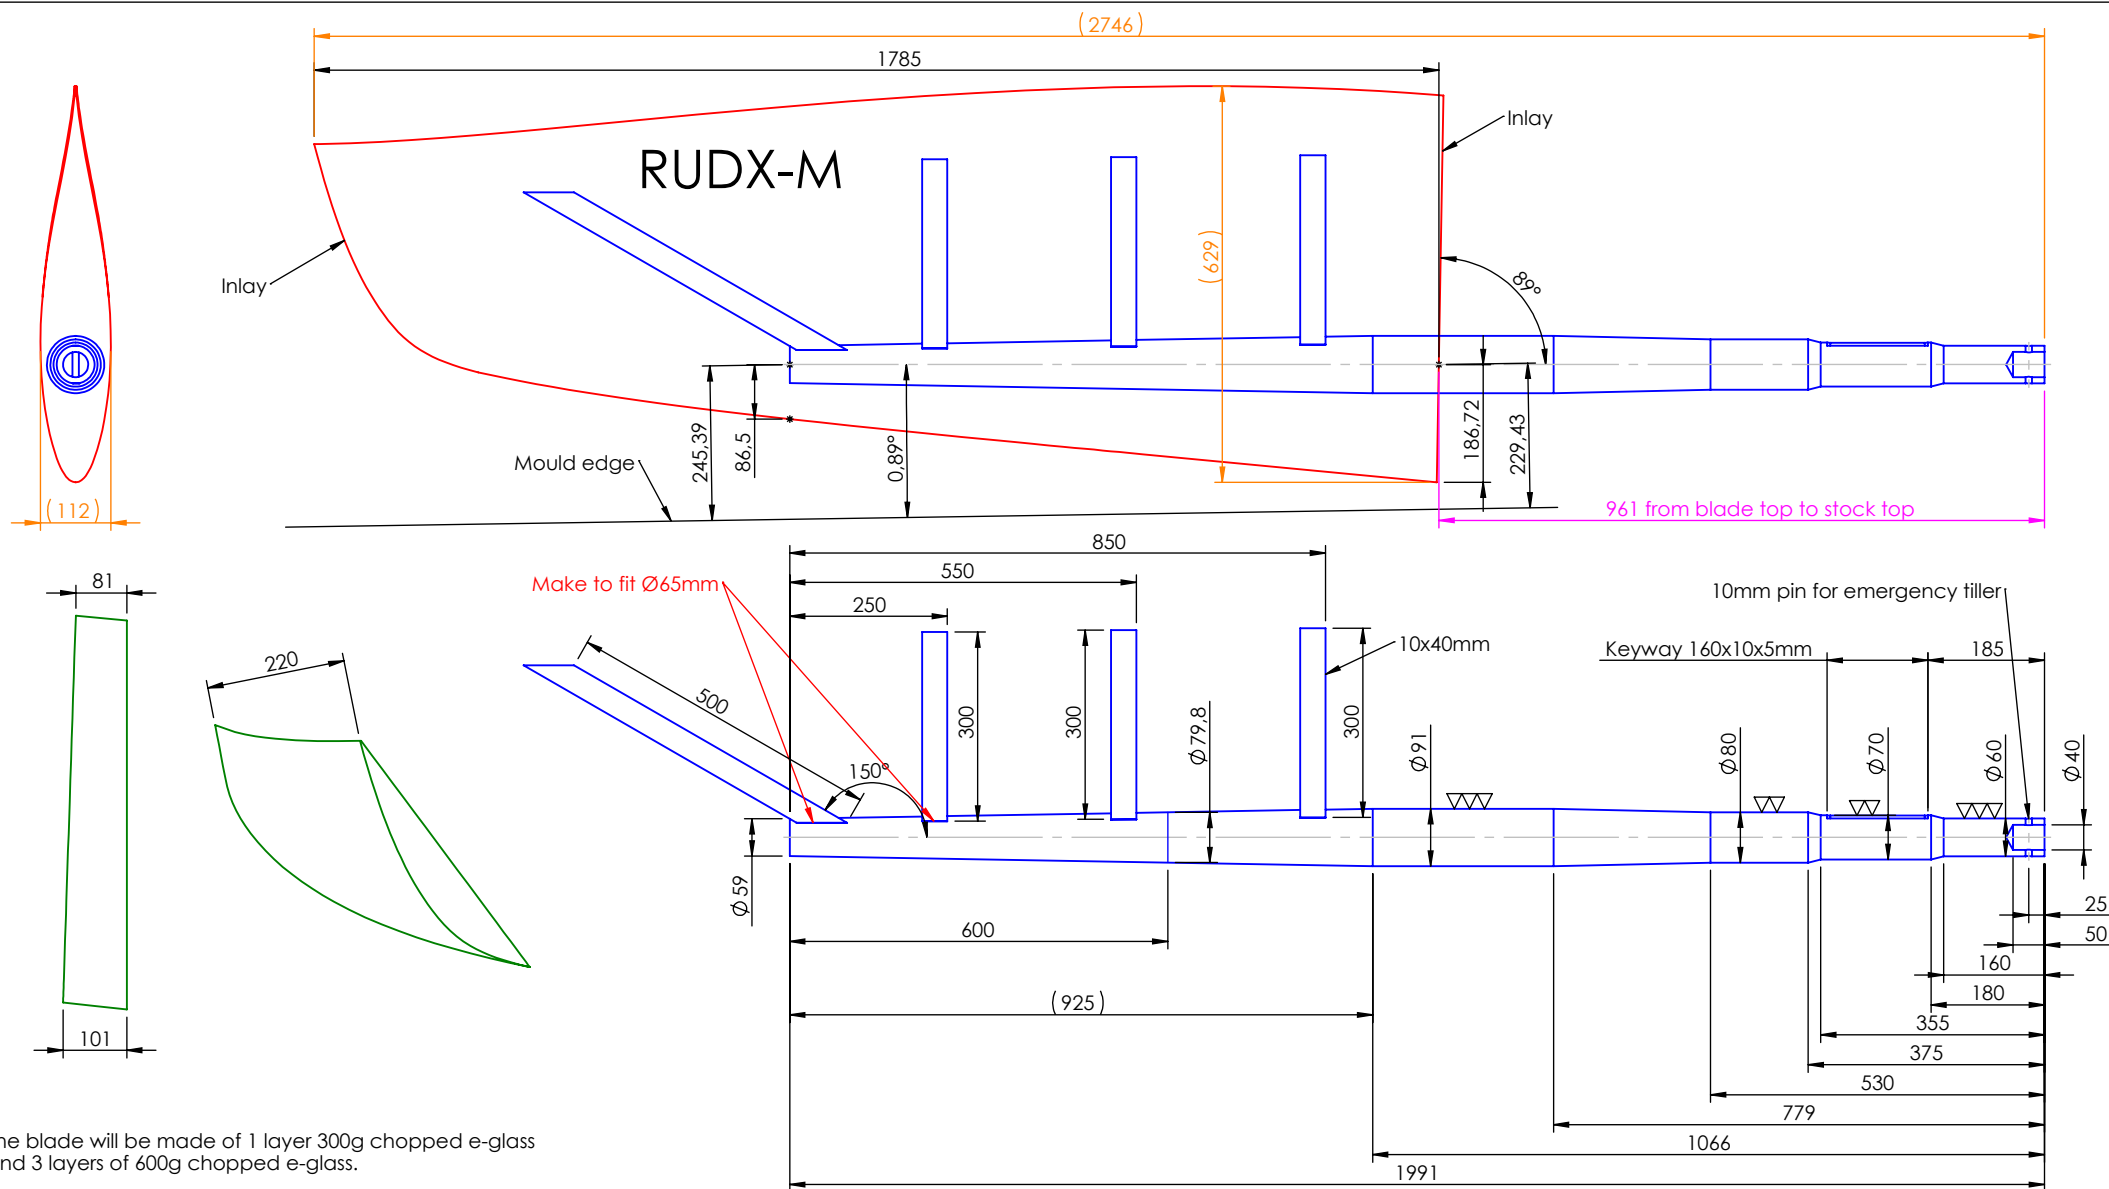

The blade will be made of 1 layer 300g chopped e-glass and 3 layers of 600g chopped e-glass.

The stock will be laminated to one side of the blade with 2 layers of 600g e-glass.

The blade will be filled with a PU foam core. Minimum density per cubic meter 80kg.

Welding of spokes, will be MIG welding.

The rudder will be made after ISO12215-8

A= 0,88 m²
V= 54,29 dm³

RUDX-M

Project X4.3 MKII	Product Name: Shallow Rudder	Filename X4.3 MKII Shallow Rudder
<i>Jefa Rudder</i> S Y S T E M S	Drawing no. X4.3MKII-ROR-S	Sheet: 1 of 1
JEFA MARINE A/S NIMBUSVEJ 2 2670 GREVE. DENMARK Tlf: +45 4615 5210 Email: info@jefa.dk www.jefa.dk	Material: Alu6082	Proj. method:
Creation Date: 16-01-2024	Scale: 1:12	Format: A4
Author: Thor	Dimensions are given in mm. Dimensions without tolerances according to DS/ISO 2768-m.	
		This drawing belongs to Jefa Marine A/S and may not be used or shown without permission.