


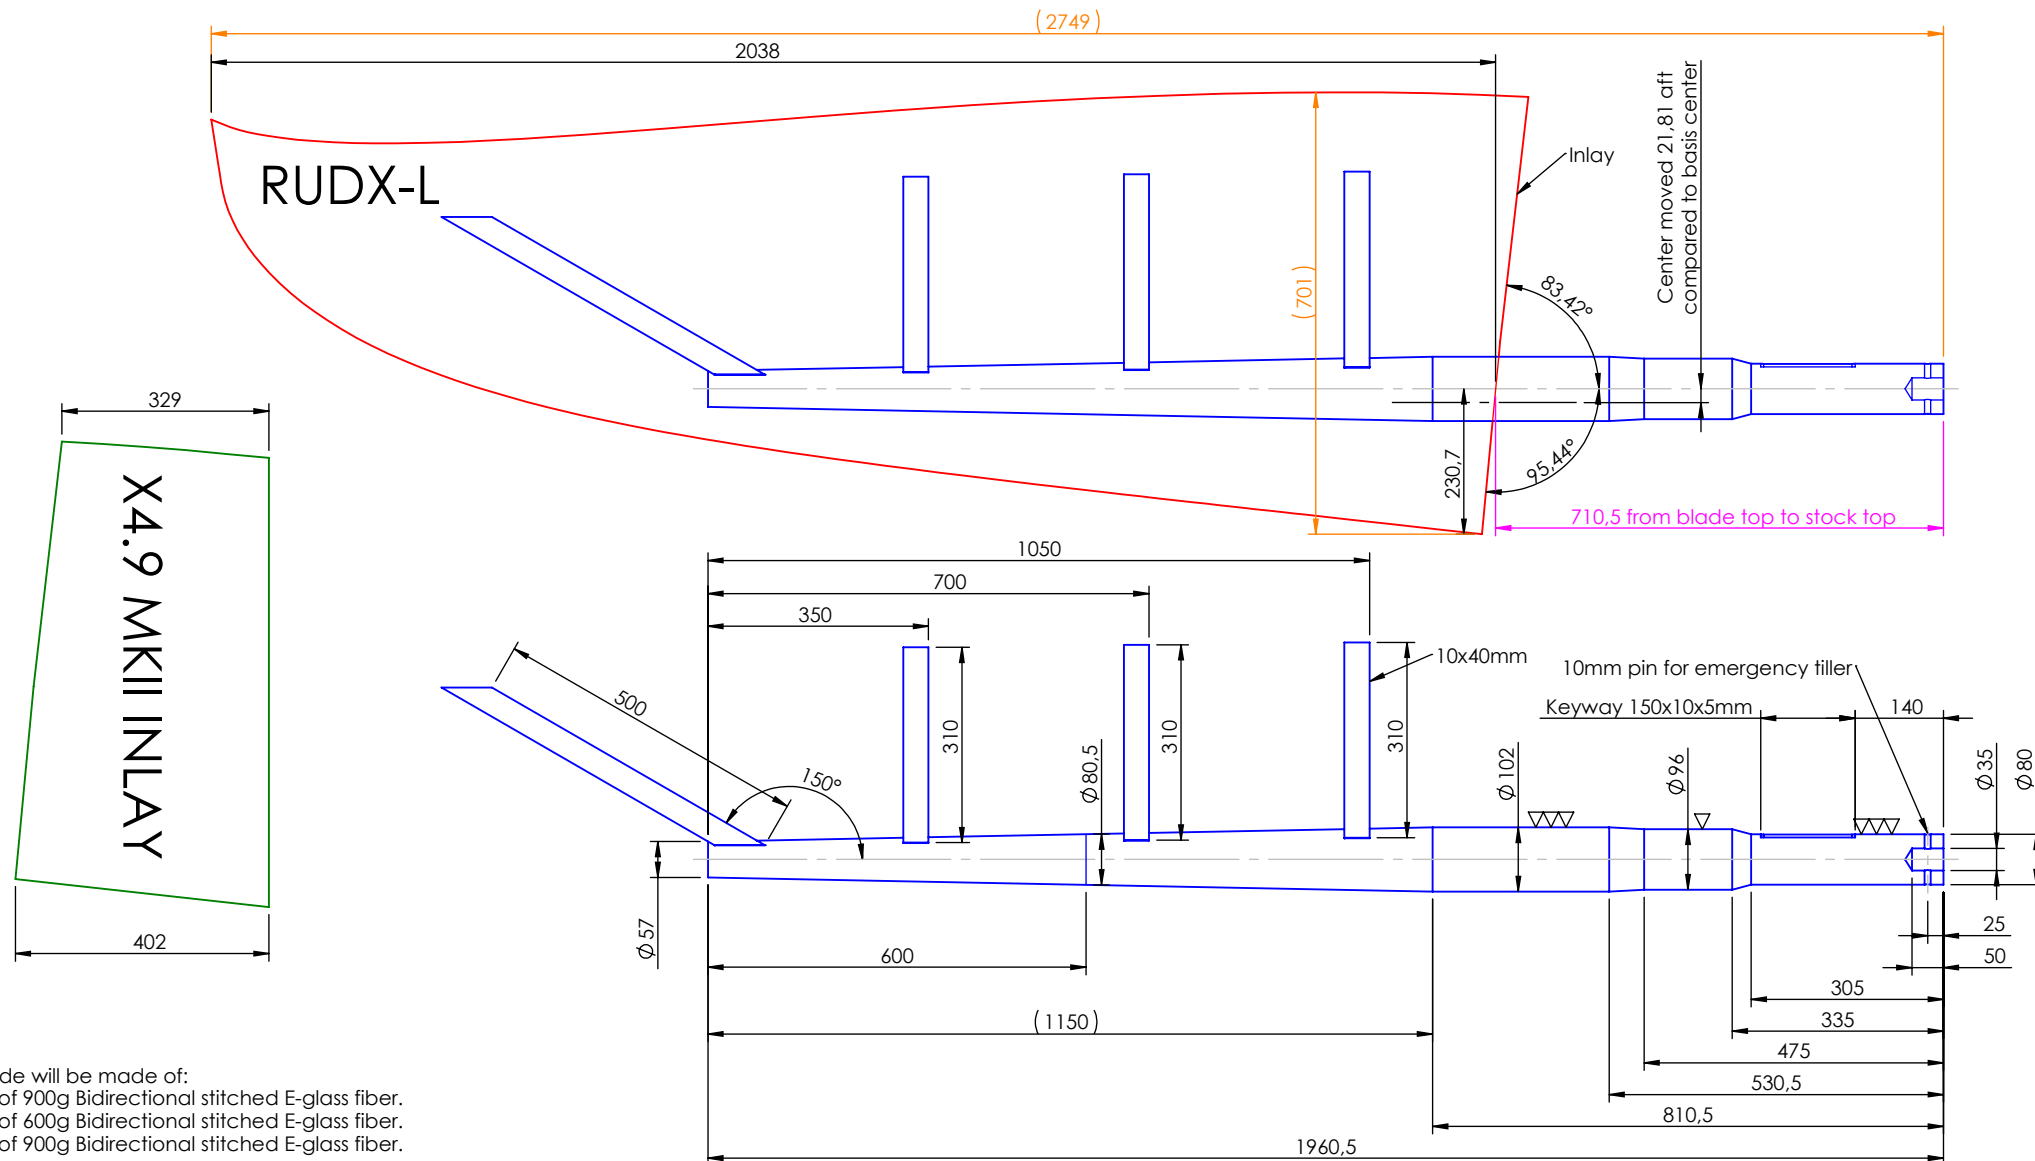

The blade will be made of:
 1 layer of 900g Bidirectional stitched E-glass fiber.
 1 layer of 600g Bidirectional stitched E-glass fiber.
 1 layer of 900g Bidirectional stitched E-glass fiber.

The stock will be laminated to one side of the blade with
 2 layers of 600g e-glass.

The blade will be filled with a PU form core.
 Minimum density per cubic meter 80kg.

Welding of spokes will be MIG welding.

The rudder will be made after ISO12215-8

A= 1,06 m2
 V= 70,01 dm3

RUDX-L

Project X4.9 MKII	Product Name: Rudder	Filename X4.9 MKII rudder	
Jefa Rudder S Y S T E M S JEFA MARINE A/S NIMBUSVEJ 2 2670 GREVE. DENMARK Tlf: +45 4615 5210 Email: info@jefa.dk www.jefa.dk	Drawing no. X4.9MKII-ROR	Sheet: 1 of 1	Proj. method:
	Material: Alu6082	Scale: 1:12	Format: A4
	Creation Date: 14-07-2023	Dimensions are given in mm. Dimensions without tolerances according to DS/ISO 2768-m.	
	Author: Thor	This drawing belongs to Jefa Marine A/S and may not be used or shown without permission.	