

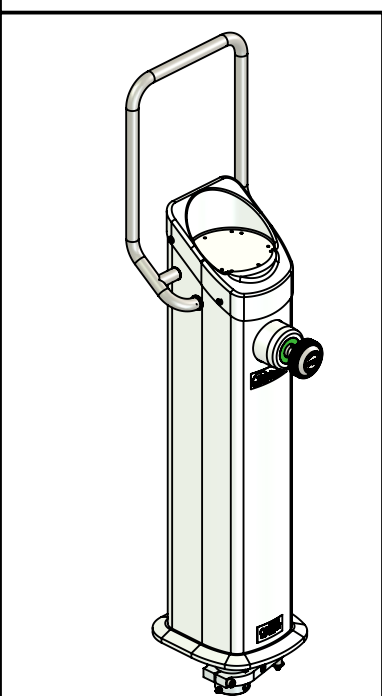
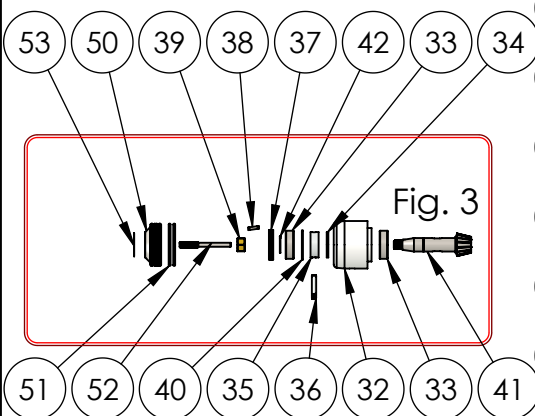


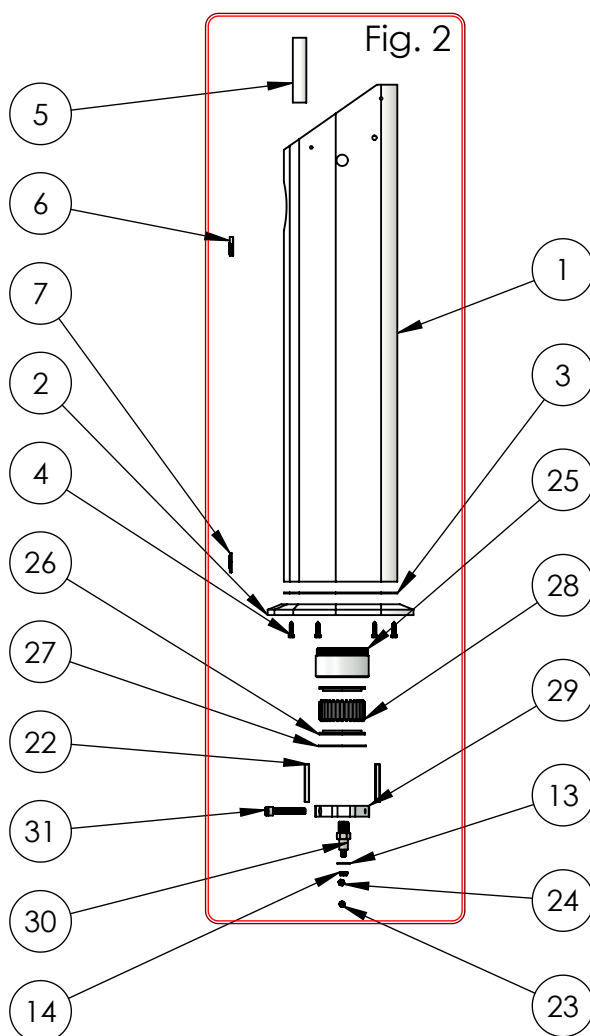

**RP150-71S**  
This is the complete list of parts for Jefa 150 pedestal. On the following pages you will find detailed information of all configurations for this pedestal.

- Contents**
1. RP150-71S part list
  2. Pedestal height (fig. 1, 2)
  3. Input socket (fig. 3)
  4. Accessories
  5. Accessory part list

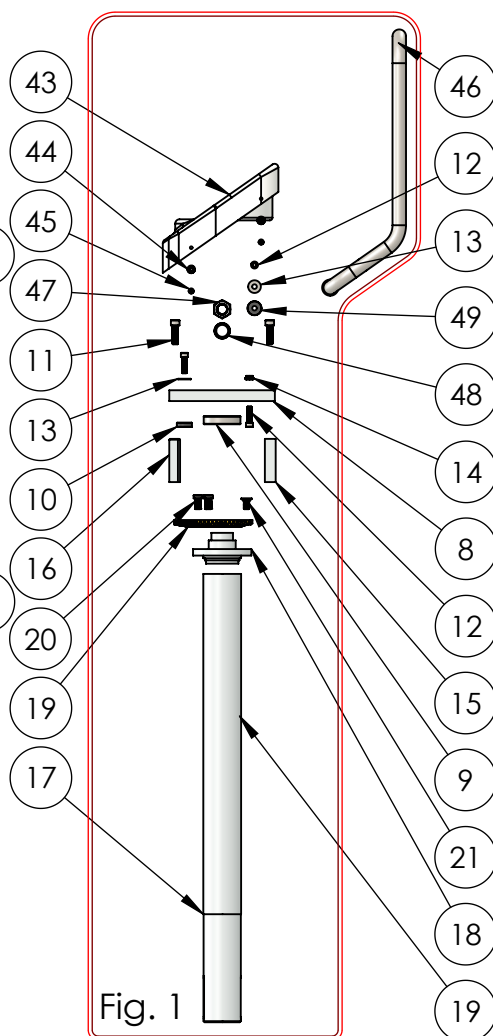


| ITEM NO. | RP150-71S part list                                     | QTY.   |
|----------|---------------------------------------------------------|--------|
| 1        | Z4-701 Tube RP150                                       | 1      |
| 2        | Z4-708 Bottom plate RP150                               | 1      |
| 3        | Z4-300 SkumlisteSBV25 sort RP150                        | 0,8m   |
| 4        | Z-DIN7976-6,3x25 Hexagon head self tapping screw        | 8      |
| 5        | Z0-ARØ25x2,0 ø25x2mm Aluminum tube                      | 0,12 m |
| 6        | ZB0406 Jefa label 100x35                                | 1      |
| 7        | ZB0407 CE-etiket RP100, 150, 200, 300 and 400           | 1      |
| 8        | Z4-712 Top plate RP150                                  | 1      |
| 9        | ZBB-6008 ballbearing 2RS 40x68x15mm                     | 1      |
| 10       | Z4-213 RP 300 contra brick 175mm sprocket               | 1      |
| 11       | Z-DIN0912-M10x35 Hexagon socket head screw CH A2 M10x35 | 4      |
| 12       | Z-DIN0912-M08x30 Hexagon socket head screw CH A2 M8x30  | 4      |
| 13       | Z-DIN9021-M08 Washer for 8mm shaft                      | 4      |
| 14       | Z-DIN0985-M08 Locknut A2 M08                            | 2      |
| 15       | Z4-716 Front bearing plate RP150                        | 1      |
| 16       | Z4-720 Input socket plate                               | 1      |
| 17       | Z4-211 RP71 Downtube ø70x84                             | 1      |
| 18       | Z4-205 RP300 top for tube                               | 1      |
| 19       | Z4-195 Gear M2,5 Z70                                    | 1      |
| 20       | Z-DIN7984-M10x20 Socket head thin cap screw M10x20      | 3      |
| 21       | Z-DIN7991-M10x20 Socket countersunk UH A2 M10x20        | 1      |
| 22       | Z-FED08x08x70                                           | 2      |
| 23       | Z-DIN0912-M06x16 Hexagon socket head screw CH A2 M6x16  | 1      |
| 24       | Z-DIN0985-M06 Locknut A2 M06                            | 1      |
| 25       | Z4-230 Bearinghouse RP                                  | 1      |
| 26       | Z4-246 L-ring                                           | 2      |
| 27       | Z4-248 Lockring ø88.5xø71                               | 1      |
| 28       | Z4-250 Rulle ø8 L=32mm                                  | 30     |
| 29       | Z4-215 Output lever                                     | 1      |
| 30       | Z4-225 Pin for output lever M18x1.5 ø16                 | 1      |
| 31       | Z-DIN0912-M10x60 Hexagon socket head screw CH A2 M10x60 | 2      |
| 32       | Z4-145 input socket                                     | 1      |
| 33       | ZBB-6205 ballbearing 2RS 25x52x15mm                     | 2      |
| 34       | ZP6-160 Brakeplate 47x26x3mm                            | 1      |
| 35       | Z4-165 Brakering for input socket ø47                   | 1      |
| 36       | Z4-170 Brake pinion Ø8x44mm stainless                   | 1      |
| 37       | ZP1-255508 Purlip seal ø25 x ø55                        | 1      |
| 38       | Z-DIN6885-5x5x20                                        | 1      |
| 39       | Z3-083 nut 5-8UNF brass                                 | 1      |
| 40       | Z-DIN0472-J52 Circlip inside J52 DIN472                 | 1      |
| 41       | Z4-190 RP300 input pinion 25mm 14T                      | 1      |
| 42       | Z-DIN0471-A25 Lockring outside A25 DIN471               | 1      |
| 43       | Z4-705 RP150 Small Head                                 | 1      |
| 44       | Z-WS9255-M5 Decorative washer 5,5mm A4                  | 4      |
| 45       | Z-DIN7991-M05x12 Socket countersunk UH A2 M5x12         | 4      |
| 46       | Z4-730 RP150 guardrail std                              | 1      |
| 47       | Z4-403 Nut Alloy M20-NV27                               | 2      |
| 48       | Z4-728 POM ring for RP150 guardrail                     | 2      |
| 49       | Z4-729 POM ring for RP150 guardrail                     | 2      |
| 50       | Z4-375 Spinner brake hub                                | 1      |
| 51       | ZP3-102 O-ring 58,74x3,35                               | 2      |
| 52       | Z4-386S Spinnershaft short                              | 1      |
| 53       | ZB0405 Jefa label round ø44mm clear with blue logo      | 1      |

# Pedestal height

The height of the pedestal is measured from the cockpit floor mounting surface to the center of the input socket where you mount the steering wheel.


The pedestal height is determined by two parts, the down tube and the pedestal tube. At Jefa we produce the 150 pedestal with one standard height, 71cm.

Custom heights is possible with customer needs, and the custom height should be specified when ordering the pedestal or specific parts which are needed.

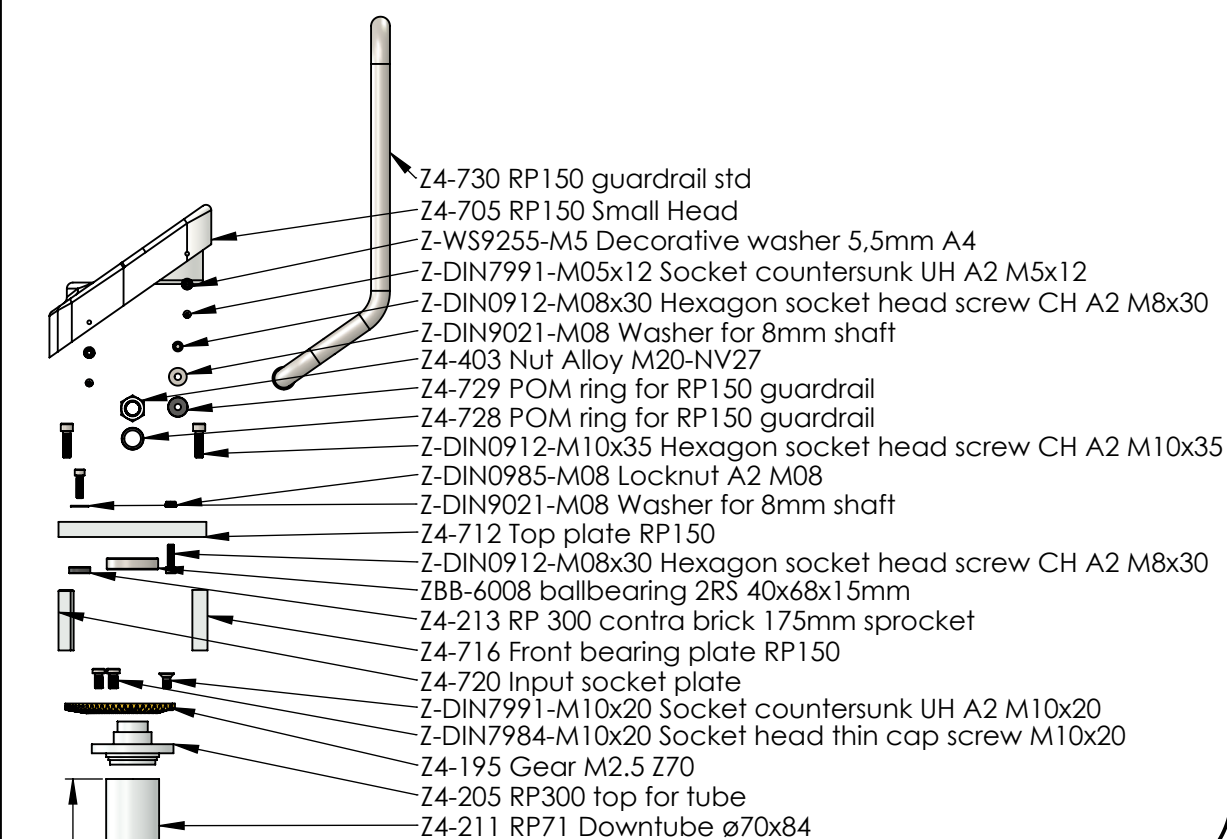

Pedestal height +118mm


Pedestal height

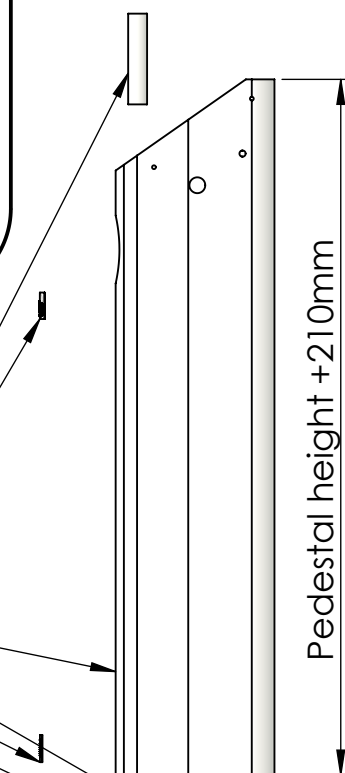

- Z0-ARØ025x2,0  $\varnothing 25 \times 2$ mm Aluminum tube
- ZB0406 Jefa label 100x35
- Z4-701 Tube RP150
- Z4-300 SkumlisteSBV25 sort RP150
- ZB0407 CE-etiket RP100, 150, 200, 300 and 400
- Z4-708 Bottom plate RP150
- Z-DIN7976-6,3x25 Hexagon head self tapping screw
- Z4-230 Bearinghouse RP
- Z4-250 Rulle  $\varnothing 8$  L=32mm
- Z4-246 L-ring
- Z4-248 Lockring  $\varnothing 88,5 \times \varnothing 71$
- Z-FED08x08x70
- Z4-215 Output lever
- Z4-225 Pin for output lever M18x1.5  $\varnothing 16$
- Z-DIN0912-M10x60 Hexagon socket head screw CH A2 M10x60
- Z-DIN9021-M08 Washer for 8mm shaft
- Z-DIN0985-M08 Locknut A2 M08
- Z-DIN0985-M06 Locknut A2 M06
- Z-DIN0912-M06x16 Hexagon socket head screw CH A2 M6x16

# Input socket

The input socket has a standard mounting for all jefa pedestals, but different variations in the input socket is necessary for Jefas different kinds of steering wheels. **Single spoke** steering wheels has a short hub, and a short spinner shaft is necessary to use the wheel brake in the input socket. **Tandem spoke** steering wheels has a longer hub, and in this case a long spinner shaft is needed. "Small" steering wheels including up to 1500mm wheels are mounted on a 25mm shaft and one Z-DIN6885-5x5x20mm key on a **small cone**. All wheels larger than 1500mm are mounted on a 30mm shaft and 2pcs Z-DIN6885-5x5x20mm keys on a **big cone**.

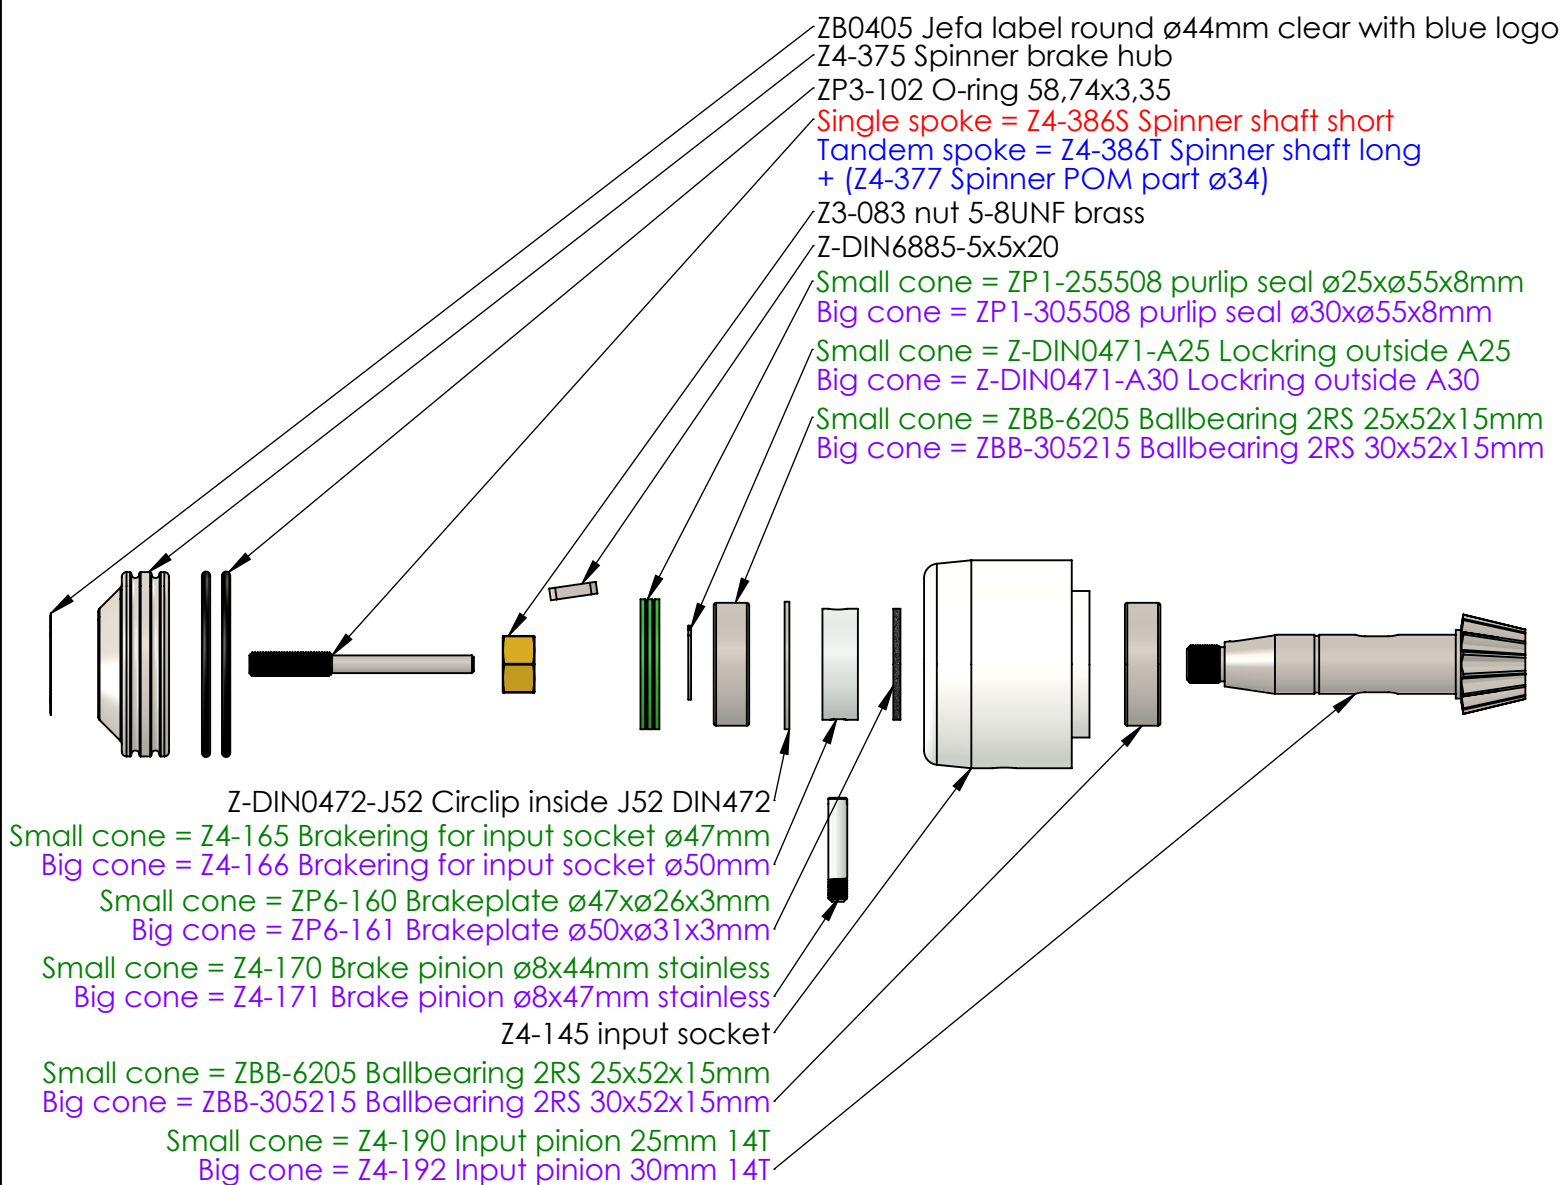


# Accessories

For Jefa 150 pedestal we deliver additional accessories such as compasses, cockpit table and engine control. In the following page you will find the accessories which can be delivered by Jefa and fits your 150 pedestal.



## Big Head

Jefa has a bigger pedestal head which can be mounted directly on the pedestal tube instead of the original small head. The compass from the small head can be moved to the big head, and there is additional space to accommodate plotter, instruments and buttons.

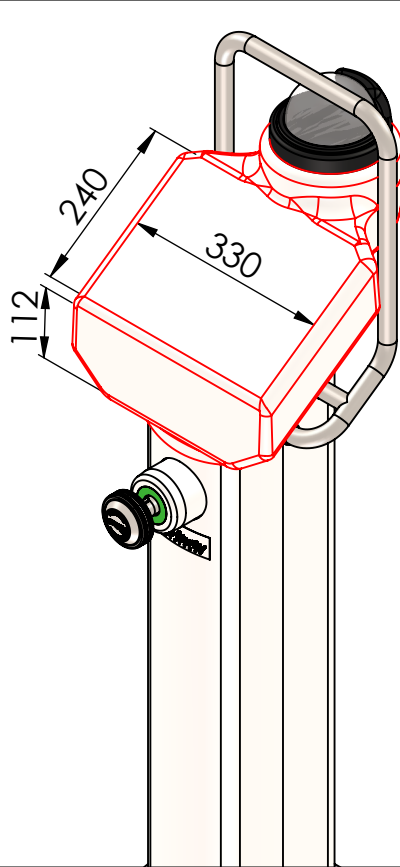

## Cockpit table

For Jefa's 150 pedestal, we can provide a teak cockpit table with a good functionality, such as folding the table together and closing it down to be parallel with the pedestal tube. It is easy and fast to pick the table of the pedestal. The table surface at normal use is 650x700mm. When purchasing a cockpit table you will receive the fittings to mount the table. But it is possible to order the fittings without table if you have a table you wish to mount on your pedestal.


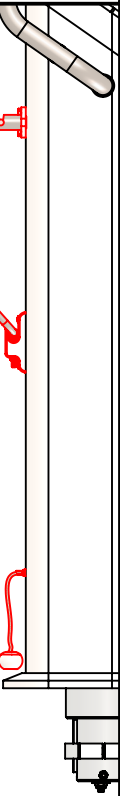


## Engine control

Teleflex TFX engine control mechanism with polished stainless steel handle. The complete mechanism is mounted inside the pedestal.


## Compasses

Jefa has two compasses for the 150 pedestal, Plastimo Olympic 135 and Plastimo Horizon 135, which both can be mounted on the horizontal top surface.

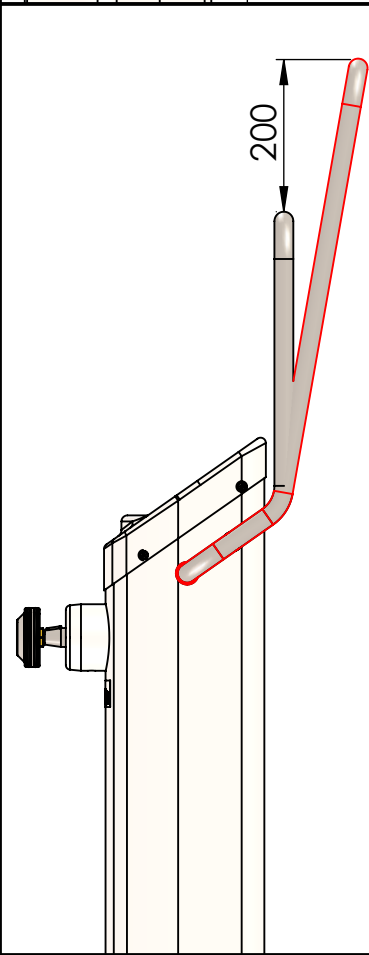


## Guardrails

For Jefa's 150 pedestal, the customer has an opportunity to choose an extended guardrail. GUA150E is higher and kicked back for extra space, and has the possibility to install an instrument pod, or radar pod if needed. Cable's can be pulled through the guardrail tube, and out inside the pedestal.

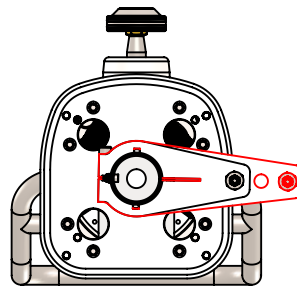




## Output arm

Extended output lever is used for attaching drive unit or special rudder geometry.

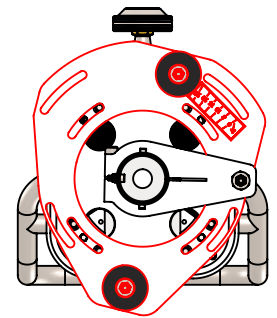


## Stop ring

Our stop ring fits the mounting screws under the pedestal. It can be adjusted up to 25°.





## Mounting studs

M10 studs are available for all our pedestals in the specific length which fit the deck thickness of the yacht.

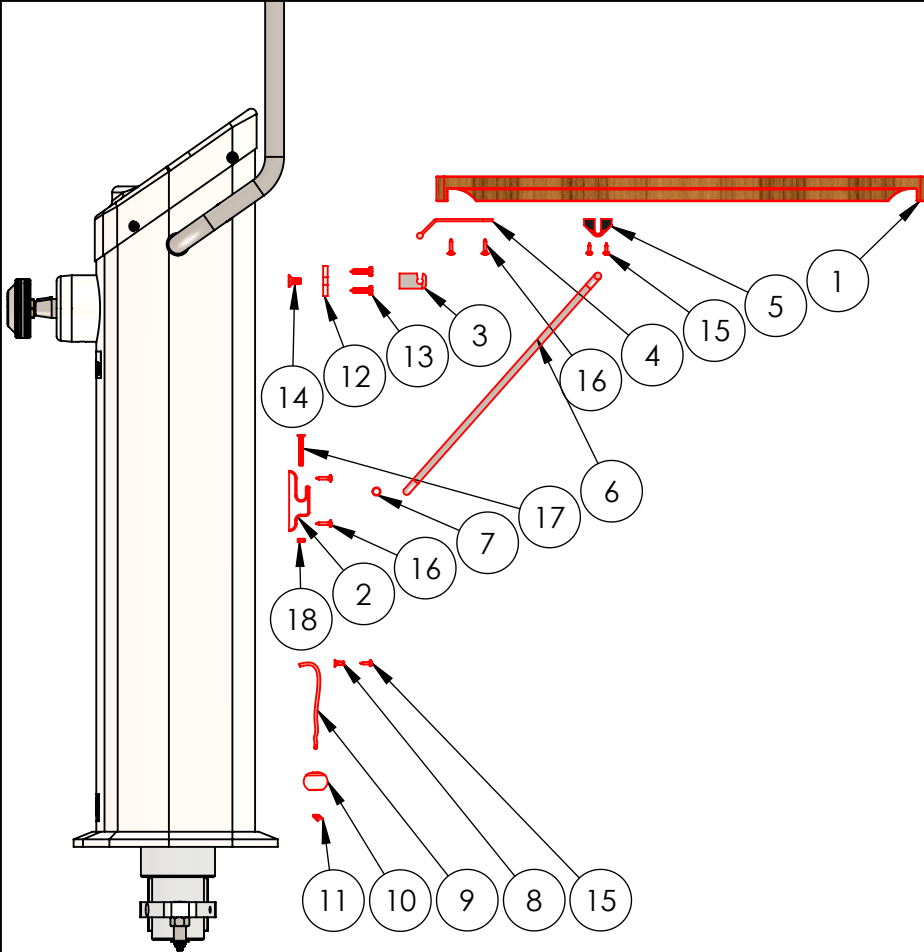

| ITEM NO. | CT150 part list                                  | QTY. |
|----------|--------------------------------------------------|------|
| 1        | Z2-100 Cockpittable                              | 1    |
| 2        | Z2-075 Cockpittable stop RP100-300               | 1    |
| 3        | Z2-085 Cockpittable Hook RP100                   | 2    |
| 4        | Z2-092 300 Hinge for Cockpittable                | 1    |
| 5        | Z2-109 Bearing for U-bend, cockpittable          | 2    |
| 6        | Z2-105 U-bend for cockpittable                   | 1    |
| 7        | Z2-106 Nylontylle                                | 1    |
| 8        | Z2-115 S.S. Eye strap                            | 1    |
| 9        | Z2-120 Rubberband                                | 1    |
| 10       | Z2-125 Plastic ball for rubberband               | 1    |
| 11       | Z2-130 Clamp ring for shock cord                 | 1    |
| 12       | Z2-097 Cockpittable bracket RP150                | 1    |
| 13       | Z-DIN7976-6,3x25 Hexagon head self tapping screw | 4    |
| 14       | Z-DIN7991-M08x16 Socket countersunk UH A2 M8x16  | 2    |
| 15       | Z-DIN7981H-4,2x13 Plate screw PH 4,2x13mm        | 6    |
| 16       | Z-DIN7983H-4,8x19 Platescrew LH 4,8x19mm         | 6    |
| 17       | Z-DIN7991-M05x40 Socket countersunk UH A2 M5x40  | 1    |
| 18       | Z-DIN0934-M05 Hexagon nut A2 M5                  | 1    |

| ITEM NO. | EC150 part list                                   | QTY. |
|----------|---------------------------------------------------|------|
| 1        | Z4-353 Cover for EC RP150                         | 1    |
| 2        | Z4-355 Handle for TX700                           | 1    |
| 3        | Z4-356 Support washer delrin                      | 1    |
| 4        | Z4-357 Foam packing for handle Ø46mm              | 1    |
| 5        | Z4-358 Bottom for Engine control                  | 1    |
| 6        | Z4-360 EC TFX B700 mechanism                      | 1    |
| 7        | Z-DIN7991-M04x12 Socket countersunk UH A2 M4x12   | 4    |
| 8        | Z-DIN7991-M04x25 Socket countersunk UH A2 M4x25   | 2    |
| 9        | Z-DIN0916-M08x16 Socket set screw cup point M8x16 | 2    |

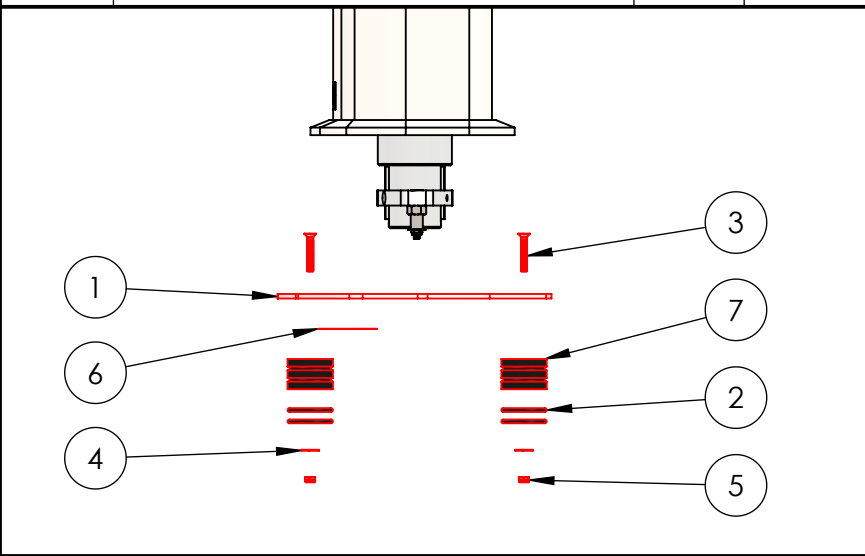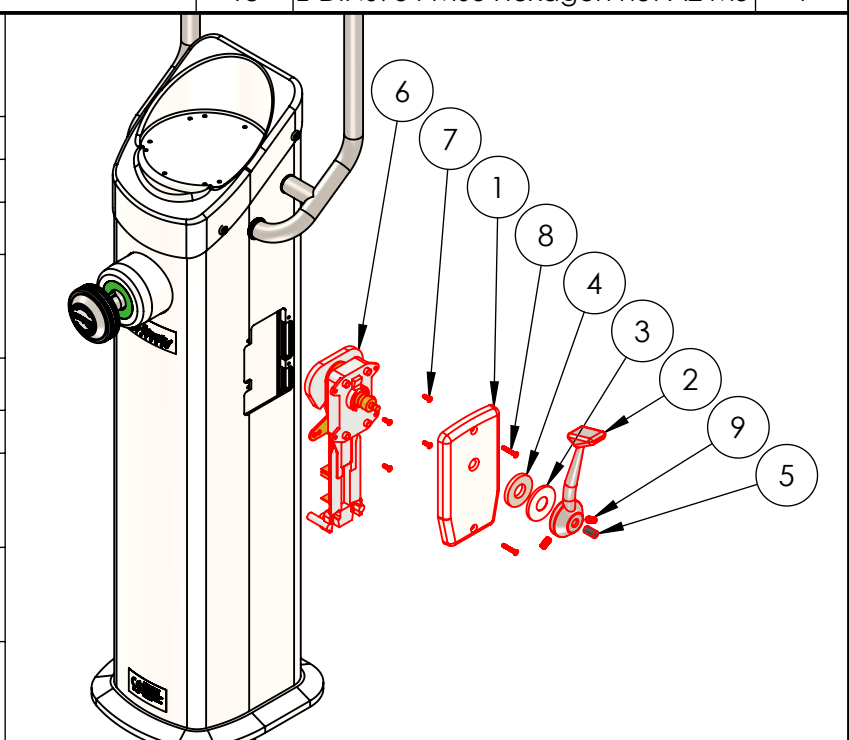

| ITEM NO. | RPSTOP part list                                | QTY. |
|----------|-------------------------------------------------|------|
| 1        | Z4-650 RP Stopping                              | 1    |
| 2        | ZP3-106 O-ring 50x5mm EPDM                      | 4    |
| 3        | Z-DIN7991-M08x50 Socket countersunk UH A2 M8x50 | 2    |
| 4        | Z-DIN9021-M08 Washer for 8mm shaft              | 2    |
| 5        | Z-DIN0985-M08 Locknut A2 M08                    | 2    |
| 6        | Z4-650 stick Sticker for stopplate              | 1    |
| 7        | Z4-651 Stopping delrin stop                     | 2    |