


REVISIONS			
Rev.	Description	Date	Author
A	Rudder stock made 10mm shorter outside the blade	17-10-2023	TCH

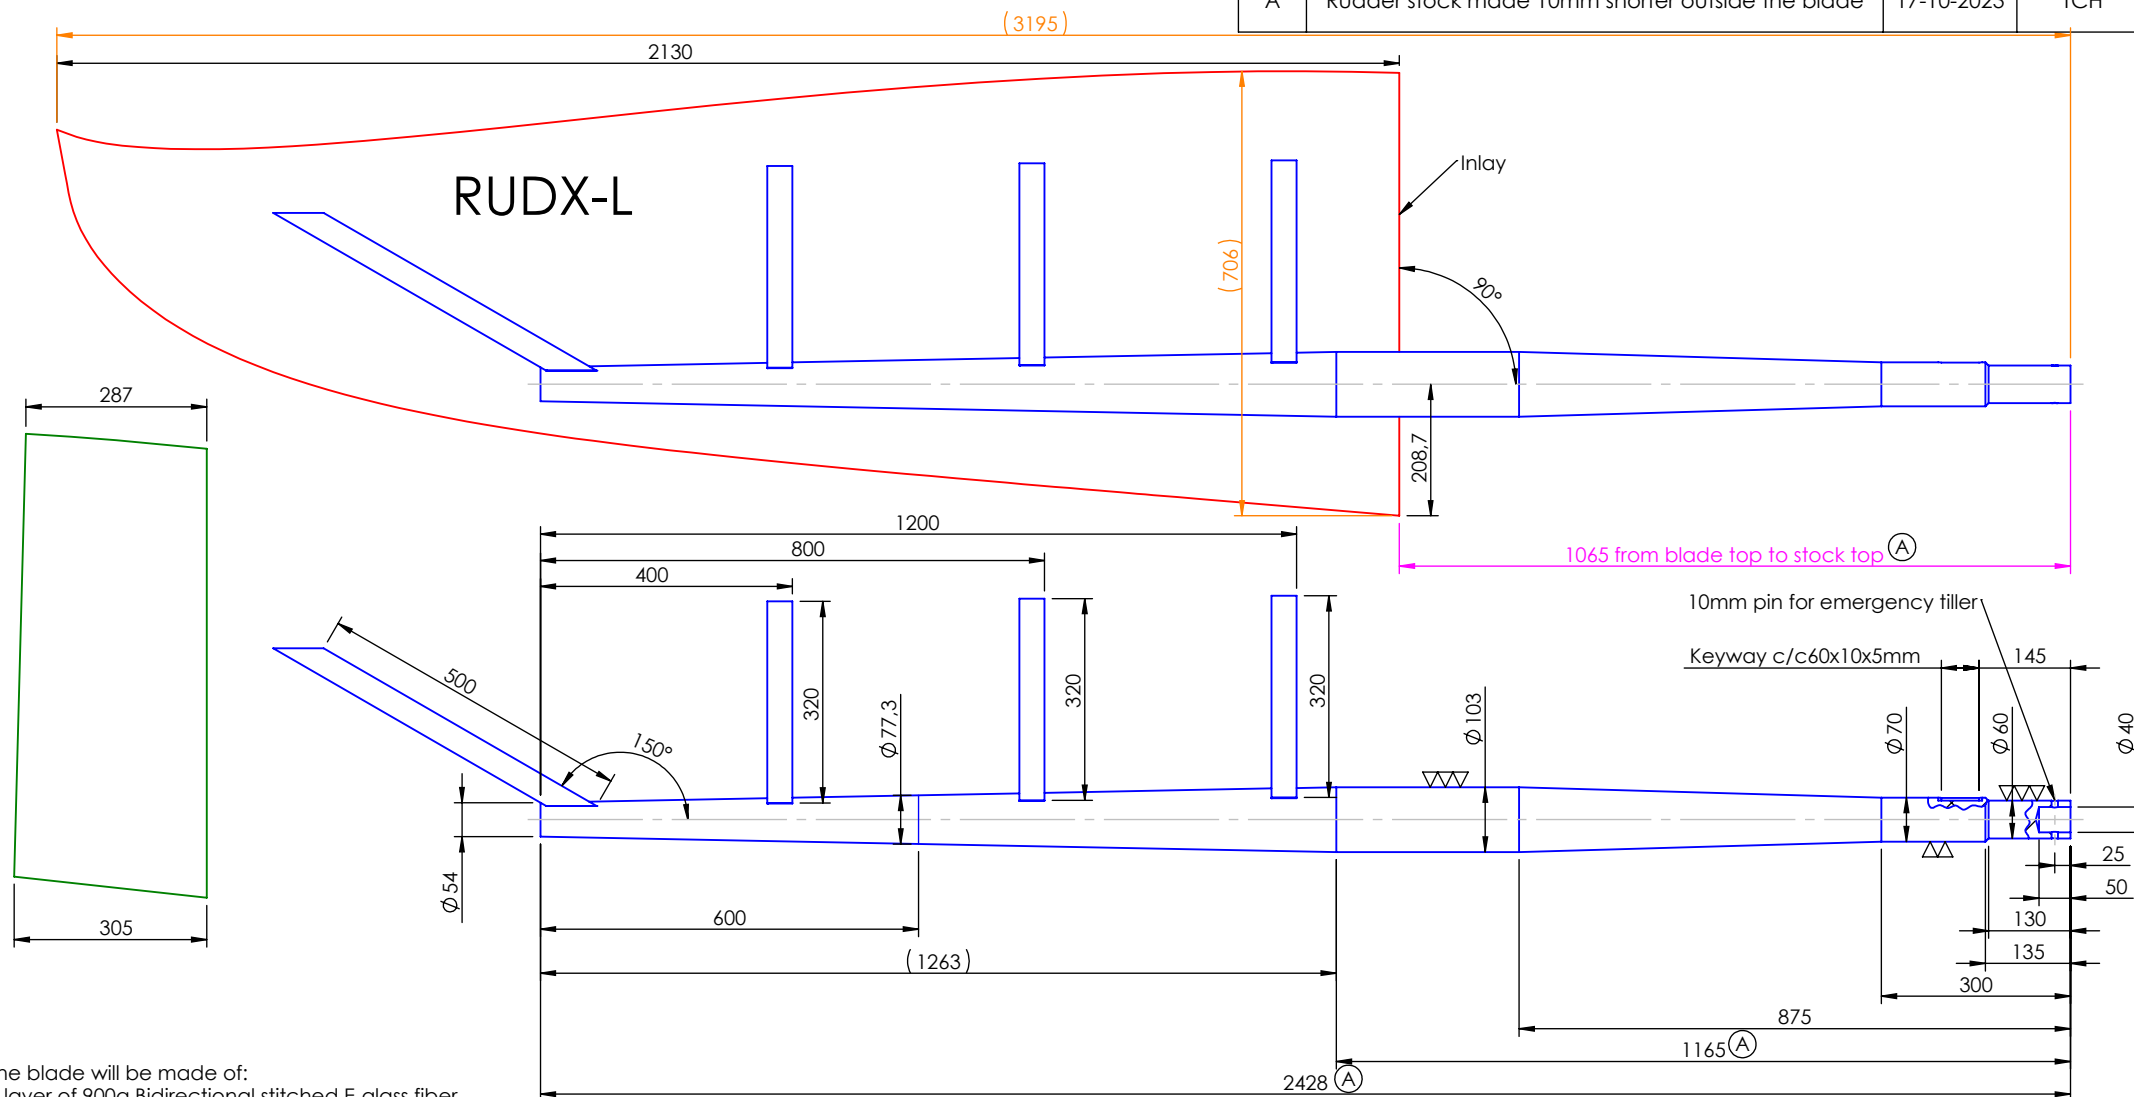

The blade will be made of:
 1 layer of 900g Bidirectional stitched E-glass fiber.
 1 layer of 600g Bidirectional stitched E-glass fiber.
 1 layer of 900g Bidirectional stitched E-glass fiber.

The stock will be laminated to one side of the blade with
 2 layers of 600g e-glass.

The blade will be filled with a PU foam core.
 Minimum density per cubic meter 80kg.

Welding of spokes will be MIG welding.

The rudder will be made after ISO12215-8

A= 1,11 m²
 V= 74,34 dm³

RUDX-L

Project XC47	Product Name: Rudder		Filename XC47 Rudder Rev. A	
 JEFA MARINE A/S NIMBUSVEJ 2 2670 GREVE. DENMARK Tlf: +45 4615 5210 Email: info@jefa.dk www.jefa.dk	Drawing no. XC47ROR		Sheet: 1 of 1	Proj. method: 
	Material: Alu 6082		Scale: 1:12	Format: A4
	Creation Date: 21-06-2023		Dimensions are given in mm. Dimensions without tolerances according to DS/ISO 2768-m.	
	Author: Thor	This drawing belongs to Jefa Marine A/S and may not be used or shown without permission.		
CAD-System: SolidWorks				